



Datenblatt - Fiche technique - Data sheet


11.99.5634



VALUE DisplayPort Kabel, DP ST - Mini DP ST, 1,0m

VALUE Câble DisplayPort DP M - Mini DP M, 1,0m

VALUE DisplayPort Cable, DP - Mini DP, M/M, 1 m

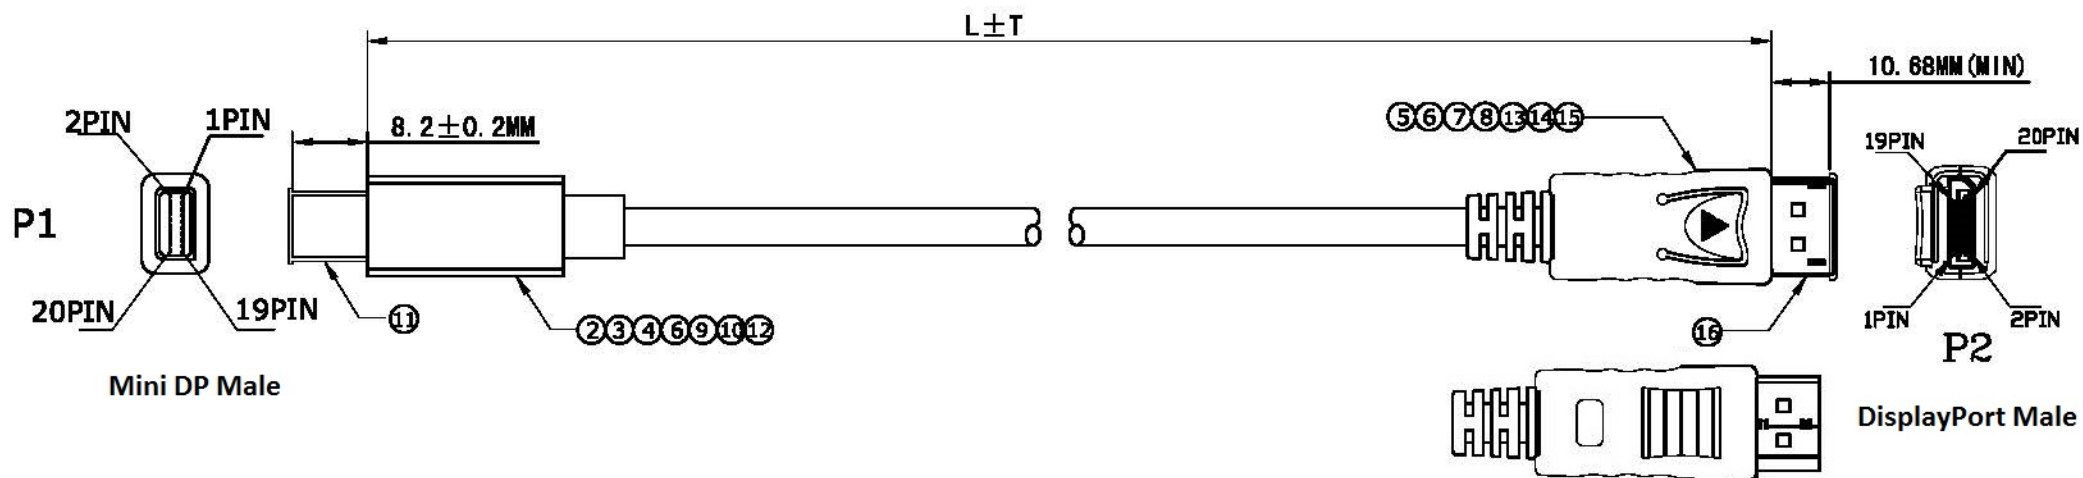


ELECTRICAL TEST:

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:* OHM(MAX) (see below item no. chart)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

Item no.	L (m)	T (mm)	CONTACT RESISTANCE
11.99.5634	1m	30mm	1 OHM(MAX)
11.99.5635	2m	30mm	2 OHM(MAX)
11.99.5636	3m	50mm	2 OHM(MAX)
11.99.5637	5m	60mm	3 OHM(MAX)

PIN Assignment

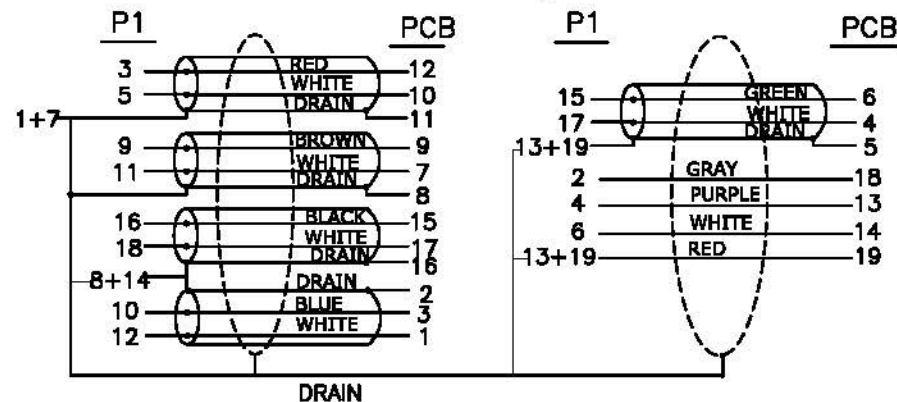

16	DisplayPort Transparent dust cover	1	pcs
15	DisplayPort M ABS upper shell, color: black	1	pcs
14	DisplayPort M ABS bottom shell, color: black	1	pcs
13	DisplayPort M Insulation: black, shell Nickel, Pin Gold plated	1	pcs
12	BLACK Ø0.8*3mm	7	pcs
11	mini DisplayPort Transparent dust cover	1	pcs
10	mini DisplayPort ABS bottom shell black	1	pcs
9	mini DisplayPort M ABS upper shell black	1	pcs
8	H.S.T:Ø1.0*10mm	10	pcs
7	BLACK Ø2.0*8mm	10	pcs
6	45P PVC color: black	10	g
5	Inside Molding: PE	3	g
4	mini DisplayPort M bottom shell Nickel plated	1	pcs
3	mini DisplayPort M upper shell Nickel plated	1	pcs
2	mini DisplayPort Port M Insulation: type Nip Board, Pin Gold plated, with PCB	1	pcs
1	DisplayPort UL20276 [32AWG(7/0.08TC)*1PR+EAM]*5+32AWG(7/0.08TC)*5C+D(BC)+AB 85%(16/7/0.12AL) OD: 4.8MM, BLACK, PVC JACKET	L	m
NO	DESCRIPTION	Q'TY	UNIT

11.99.5634, 11.99.5635, 11.99.5636, 11.99.5637

VALUE DisplayPort Cable, DP-Mini DP, M/M, black

	TOLERANCE		
	INCHES M/M		
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	

rotronic

DRAWN BY HE

CHECK BY

APPD BY

SCALE	NONE	DRAWING NO.:	REV. A
UNIT	MM		
DATE	14.07.02		1/1