



Datenblatt - Fiche technique - Data sheet


11.99.9030



VALUE USB 3.1 Kabel, USB 3.1 Typ C - A, ST/BU, OTG, schwarz, 0,15 m


VALUE Câble USB 3.1, USB 3.1 Type C - A, M/F, OTG, noir, 0,15 m

VALUE Cableadapter, USB3.1, C-A, M/F, OTG, black, 0.15 m

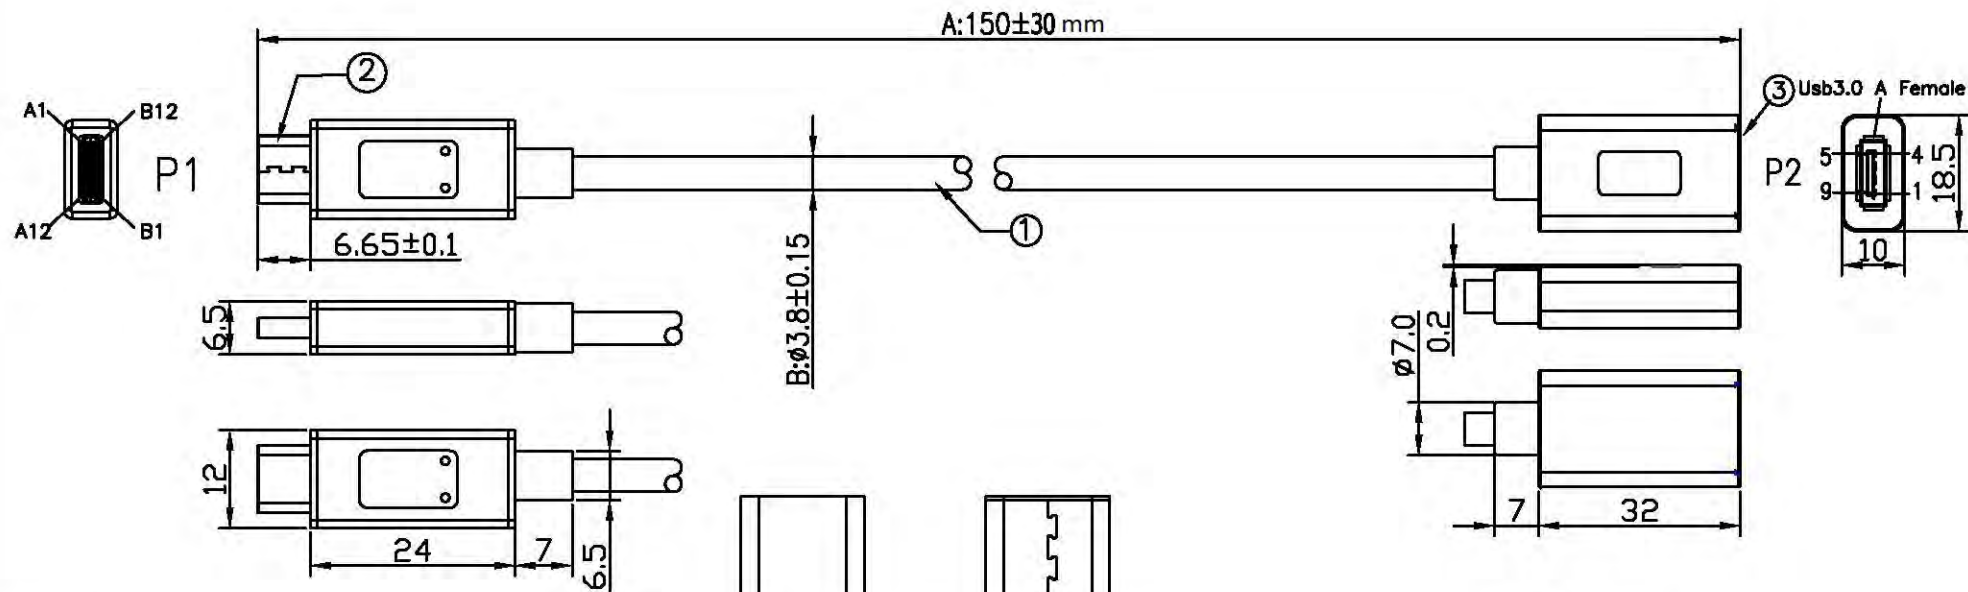

NOTE:

- 1) PRIMARY DIM: A.B
- 2) ELECTRICAL TEST:
 - 2.1) SHORT AND OPEN 100% TESTING
 - 2.2) CONDUCTOR RESISTANCE 3Ω

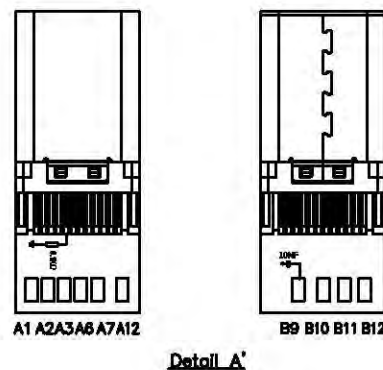

Pin Assignment

P1		P2	
A12	BRAID	4	
B9	RED	1	
A6		3	GREEN
A7		2	WHITE
A2		9	YELLOW
A3		8	BLUE
A1		7	DRAIN
B11		6	PURPLE
B10		5	ORANGE
B12		7	DRAIN

4	OUTER JACKET: PVC 45Pa, BLACK
3	USB 3.0 A/F, BLUE, SOLDERING TYPE, GOLD PLATED CONTACT PIN (1u"), NICKEL PLATED SHELL
2	USB 3.1 C/M, BLACK PIN G/F, NICKEL PLATED SHEEL, W/PCB (CC(A5)-5.1Kohm-GND, VBUS-10NF-GND)
1	UL2725 (34#*1P+AD)*2+32#*1P+26#1C+A+B(128BTA) PVC JACKET, BLACK, OD: 3.8MM, 150MM

SECOMP						
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		Item No.		11.99.9030		
DIMENSIONS		TOLERANCE		VALUE USB 3.1 Cable Adapter C-A, M/F, 0.15m, black		
0.00 TO 30.00mm		±0.10mm		CHKD.		APPD.
30.01 TO 80.00mm		±0.13mm		FPZ 2015/6/16		
80.01 TO 150.00mm		±0.15mm				
150.01mm		±0.20mm		REV. B		
MATERIAL		SCALE /				
FINISH		UNIT MM		SIZE A4		