



Datenblatt - Fiche technique - Data sheet


12.99.1075




VALUE USB - 2x PS/2 Konverter

VALUE Convertisseur USB / 2x PS/2

VALUE USB to 2x PS/2 Adapter Cable

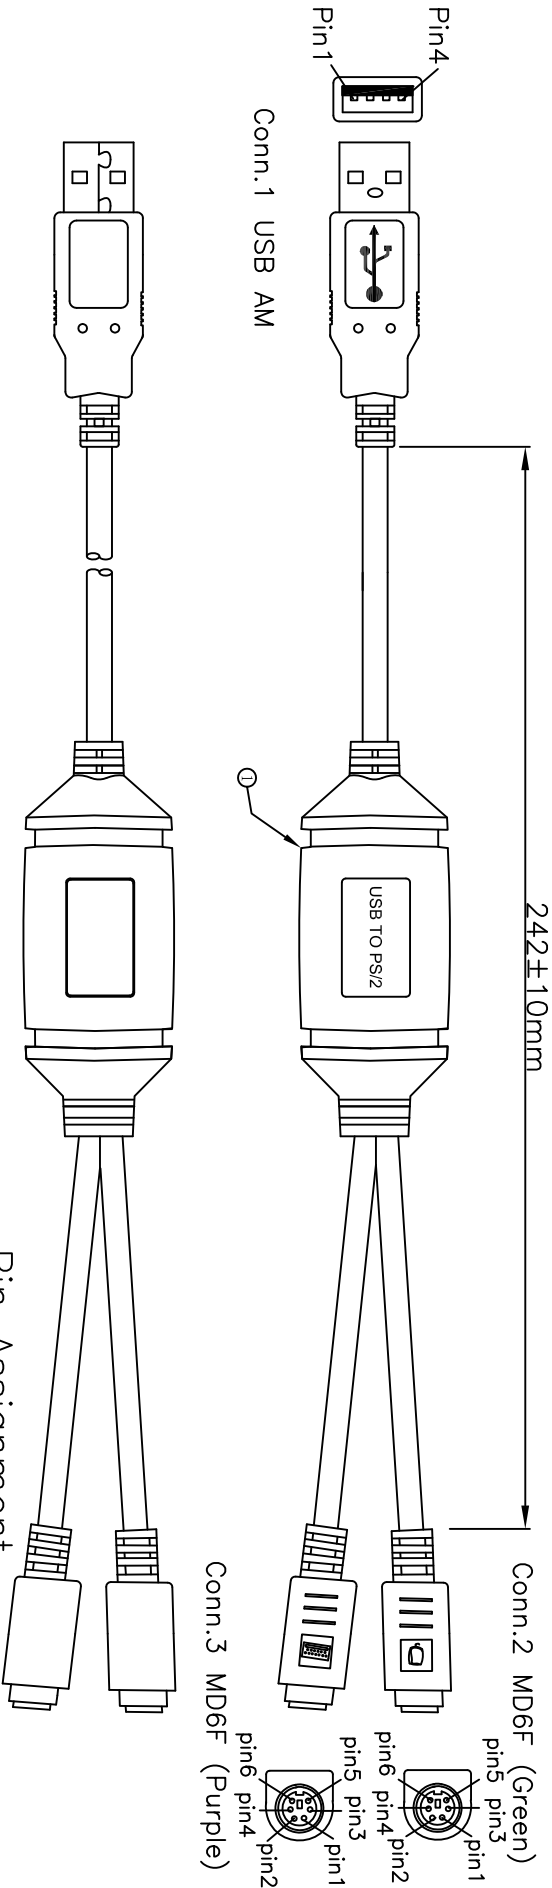

Pin Assignment

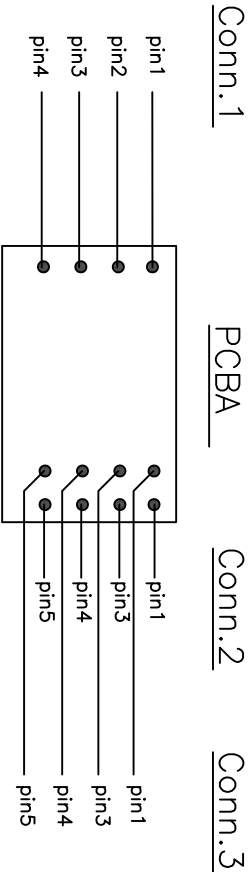

Test requirements:
1. 100% electrical testing: open circuit, short circuit, dislocation.
2. The conduction resistance: 2 ohm (MAX)
3. The insulation resistance: 10 m ohm min.
4. High voltage: 300 v DC / 10 ms

5	cable beige	1	pcs
4	Conn 1 USB AM white insulation shell plated:nickel molding beige	1	pcs
3	Conn 2 MD6F black insulation shell plated:nickel molding green	1	pcs
2	Conn 2 MD6F black insulation shell plated:nickel molding purple	1	pcs
1	B11-AA310001 USB TO PS/2 ADAPTOR marking:USB TO PS/2 beige L=240MM	1	pcs
NO	ITEM	DISCRPTION	UNIT

REV	ECN	DESCRIPTION		DATE	NAME
	TOLERANCE INCHES M/M				
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
TITLE: USB To PS/2 Adapter					
DRAWN BY		ZhouWenLong	CUSTOMER : CUSTOMER NO.: 12.99.1075		
CHECK BY		SCALE	NONE	DRAWING NO.:	REV.
		UNIT	MM		A01
APPD BY		DATE	2017.04.05	CA1790160	1/1