



Datenblatt - Fiche technique - Data sheet


12.99.3190



VALUE USB 2.0 Adapter, Typ C - MicroB, ST/BU, OTG

VALUE Adaptateur USB 3.1, USB 3.1 Type C - MicroB , M/F, OTG

VALUE Adapter, USB3.1, C - Micro B, M/F, OTG

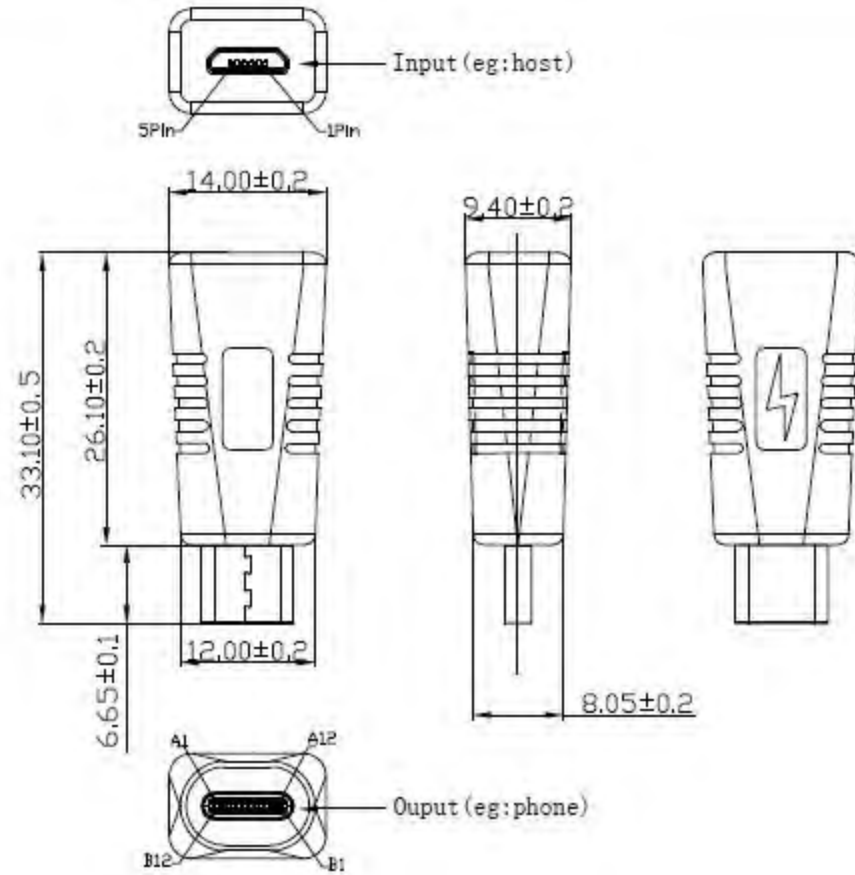

NOTE:

- 100% open short & miss wire test:
Rated current:500mA Max
Rated voltage:5V Max
Contact resistance:3MΩ Max
- RoHS 2.0 AND REACH COMPLIANT
- Operation temperature:-10℃ ~+60℃
Storage temperature:-20℃ ~ +75℃

MATERIAL LIST:

④	OUTER MOLD	PVC color For black	1	
③	PCB	USB CM-MICRO BM PCB	1	
②	USB 2.0 MICRO B TYPE	USB 2.0 MICRO B/F Type, The Pin Gold Plating, the shell for Nickel Plating	1	
①	USB C TYPE	USB C/M, Black PBT Insulation, The Pin Gold Plating, the shell for Nickel Plating	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
			2016. 07. 22	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM NO.	COLOUR	Emark	Current	Data
12. 99. 3190	Black	NO.	Max500mA	Max 480Mbps
DESC.	USB 2.0 MICRO BF/CM ADAPTER			

SECOMP