




Anwendungen / Application



8S Seriell RS-232 PCI Karte inkl. LP Bügel (SystemBase Chip-Set)

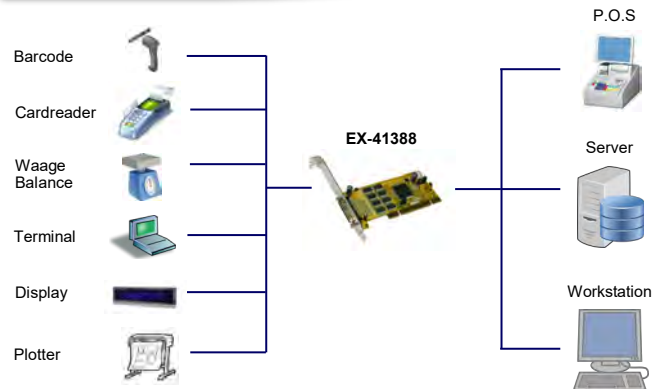

8S Serial RS-232 PCI board incl. LP bracket (SystemBase Chip-Set)

Beschreibung

Die EX-41388 PCI I/O Karte stellt acht serielle RS232 High Performance UART 16C1050 Ausgänge zur Verfügung. Sie ist entwickelt worden um vier weitere Seriellen Ports für PC, kleine Workstation oder Server über den PCI- oder PCI-X Bus zu erweitern. Die Karte ist voll Plug-and-Play kompatibel und unterstützt Linux und SCO-Unix. Die EX-41388 kann auch in ein Low Profile Computer-Gehäuse mit maximaler Bauhöhe von 8cm eingebaut werden.

Description

The EX-41388 PCI I/O adapter provides eight high performance 16C1050-type UART RS232 serial ports. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI- or PCI-X Bus. The card is fully Plug-and-Play compatible and support Linux and SCO-Unix. The EX-41388 can install also in a low profile PC case with a maximal high of 8cm.

Merkmale

- Schnittstelle: 8 x RS232 V.24
- FIFO Buffer: 16C1050 mit 256Byte
- ±15kV IEC1000-4-2 ESD Schutz für RS232 I/O's
- I/O Adressen und Interrupt wird vom System BIOS vergeben
- Daten Bits: 5, 6, 7, 8 / Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Flow Control RTS/CTS, XON/XOFF
- Unterstützt Mainboards mit 5V und 3.3V

Features

- Interface: 8 x RS232 V.24
- FIFO Buffer: 16C1050 with 256Byte
- ±15KV IEC1000-4-2 ESD Protection for RS232 I/O's
- I/O addresses and Interrupt will set from the system BIOS, IRQ sharing
- Data Bits: 5, 6, 7, 8 / Stop Bits: 1, 1.5, 2
- Parity: none, even, odd, space, mark
- Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
- Flow Control RTS/CTS, XON/XOFF
- Support Motherboards with 5V and 3.3V

Spezifikationen

- | | |
|---------------------------------|---|
| • Chip-Set: | SystemBase 16C1054PCI |
| • Datentransfer-Rate: | 300Baud bis 921.6KB |
| • Anschlüsse: | 8 x 9 Pin Seriell-Stecker (Octopus Kabel)
1 x 4 Pin Floppy-Stecker |
| • Hardwaresysteme: | PCI und PCI-X Slot 32-Bit |
| • Betriebssysteme: | Win 2000/XP/Vista/7/8.x/10 (32&64)
Server 200x & 20xx, SCO-Unix, Linux |
| • Betriebstemperatur : | 0°C bis 55° Celsius |
| • Lagertemperatur: | -40°C bis 75° Celsius |
| • Rel. Luftfeuchtigkeit: | 5% bis 95% |
| • Abmessung: | 120 x 61 mm |
| • Gewicht: | 800g |
| • Lieferumfang: | EX-41388, Octopus Kabel, LP Bügel, CD, Handbuch |

Specification

- | | |
|----------------------------------|--|
| • Chip-Set: | SystemBase 16C1054PCI |
| • Data transfer rate: | 300Baud up to 921.6KBaud |
| • Connectors: | 8 x 9 pin male connector (Octopus cable)
1 x 4 pin floppy connector |
| • Hardware system: | PCI and PCI-X slot, 32-bit |
| • Operating systems: | Win 2000/XP/Vista/7/8.x/10 (32&64bit)
Server 200x & 20xx, SCO-Unix, Linux |
| • Operating Temperature : | 32° up to 131° Fahrenheit |
| • Storage Temperature: | -40° up to 167° Fahrenheit |
| • Rel. Humidity: | 5% to 95% |
| • Size: | 120 x 61 mm |
| • Weight: | 800g |
| • Packaging contents: | EX-41388, Octopus cable, LP bracket, CD, Manual |

System / OS

Geprüft / Approved

Verpackung / Packaging

