

Bild / Picture




USB 2.0 zu 4 x Serielle RS-232 Ports mit 37 Pin Buchse, (FTDI Chip-Set)

Beschreibung

Das USB 2.0 zu RS-232 Kabel stellt vier Serielle RS-232 High Performance UART 16C550 Ausgang zur Verfügung. Er ist entwickelt worden um vier weitere Serielle Ausgänge für Notebook, PC, kleine Workstation oder Server über den USB 2.0 Bus zu erweitern. Durch die einfache Installation muss der Rechner nicht geöffnet werden und die EX-1324-37P kann bei laufendem Betrieb installiert werden. Die EX-1324-37P hat eine 37 Pin Buchse an das dass mitgelieferte Octopus Kabel OPTC4-9 angeschlossen werden kann.

Anwendung / Application

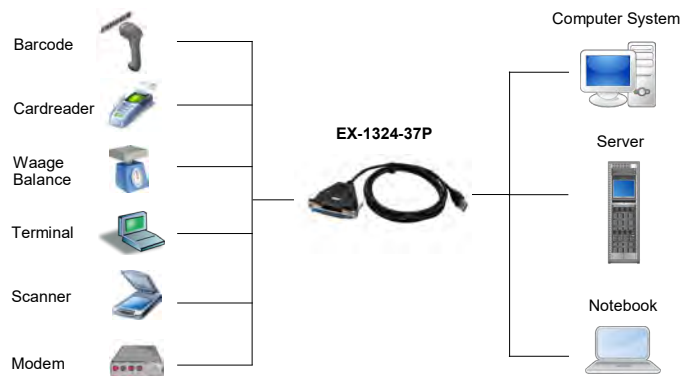

USB 2.0 to 4S x RS-232 ports with 37 pin female (FTDI chip-set)

Description

The USB 2.0 to RS-232 cable provides four high performance 16C550-type UART compatible RS-232 serial port. It is designed for Notebook, PC, thin client or server to provide instant COM port expansion via the USB 2.0 Bus. With the easy installation you don't need to open the computer system and install the EX-1324-37P when the system run. The EX-1324-37P has a 37 pin socket to which the supplied Octopus cable OPTC4-9 can be connected.

Merkmale

Features

• Schnittstelle RS-232 V.24 (37 Pin)	• Interface RS-232 V.24 (37 pin)
• 16C550 FIFO Buffer mit 16Byte	• 16C550 FIFO Buffer with 16Byte
• Daten Bits: 7 und 8	• Data bits: 7 and 8
• Stop Bits: 1, 1.5 und 2	• Stop bits: 1, 1.5 and 2
• Parity: none, even, odd, space und mark	• Parity: none, even, odd, space and mark
• Signale RS232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND	• Signal RS232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
• Stromversorgung vom USB Bus (Bus Power)	• Power from the USB Bus (Bus Power)

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	FTDI	Chip-Set:	FTDI
Datentransfer-Rate:	300Baud bis 921.6KBaud	Data transfer rate:	300Baud up to 921.6KBaud
Anschlüsse:	1 x USB 2.0 A-Stecker Upstream 1 x 37 Pin Buchse 4 x 9 Pin Seriell RS-232 (Octopus-Kabel)	Connectors:	1 x USB 2.0 A-male Upstream connector 1 x 37 pin female connector 4 x 9 pin serial RS-232 connectors (Octopus cable)
Hardwaresysteme:	USB 1.1, 2.0 oder 3.2 Gen1	Hardware system:	USB 1.1, 2.0 or 3.2 Gen1
Treiber:	Win98SE/ME/XP/200x/Vista/7/8/10 (32&64-Bit) Win Server 20xx/WinCE, Linux, MAC OS 10.x	Driver:	Win98SE/ME/XP/200x/Vista/7/8/10 (32&64-Bit) Win Server 20xx/WinCE, Linux, MAC OS 10.x
Betriebssysteme:	Gemäß Treiber	Operating systems:	According to driver
Betriebstemperatur :	0°C bis +55°C	Operating temperature :	32°F up to 131°F
Lagertemperatur:	-40°C bis +75°C	Storage temperature:	-40°F up to 167°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	Vom USB Port	Current Supply:	from the USB port
Abmessung:	Kabellänge 1.8 Meter	Size:	Cable length 1.8 meter
Gewicht:	450 g	Weight:	450 g
EAN:	4718359132469	EAN:	4718359132469
Ursprungsland:	Taiwan	Country of origin:	Taiwan
Lieferumfang:	EX-1324-37P, Octopus Kabel 4 x 9 Pin Seriell, Treiber CD, Handbuch	Packaging contents:	EX-1324-37P, Octopus cable 4 x 9 pin serial, Driver CD, Manual