



Datenblatt - Fiche technique - Data sheet


21.15.2803



ROLINE Patchkabel Kat.6A S/FTP (PiMF), Component Level, LSOH, grau, 3,0 m

Cordon ROLINE S/FTP(PiMF) Cat.6A / 10 Gigabit, LSOH, Component Level, gris,
3,0 m

ROLINE S/FTP Patch Cord Cat.6A, Component Level, LSOH, grey, 3.0 m

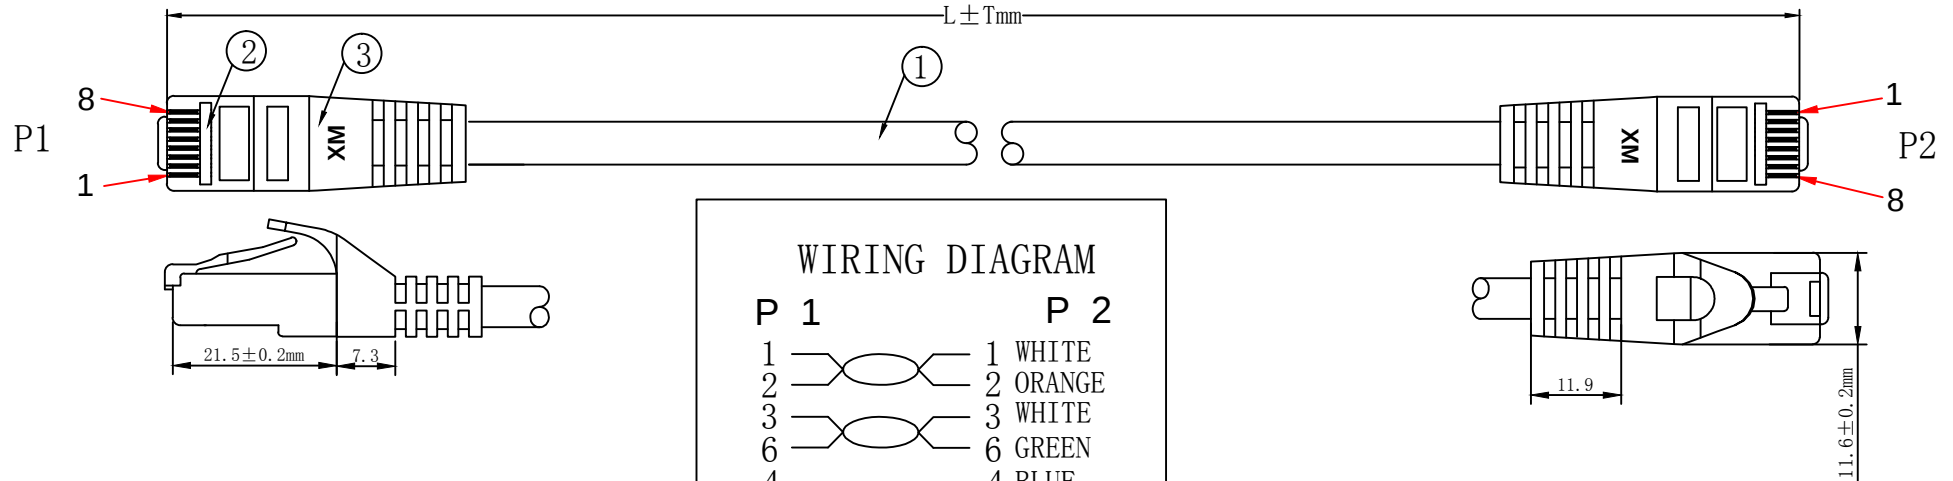

1. ELECTRICAL TEST:

- (1).100% OPEN SHORT & MISS WIRE TEST;
- (2).INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3).CONTACTOR RESISTANCE:30 OHM MAX

2.PRINTING:GHMT® roline CAT.6A S/FTP COMPONENT PATCH CORD LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3.100% Component Patch cord Test PASS

4.Minimum bending radius:60mm

MATERIAL LIST

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Grey	2PCS	
②	CONNECTOR	RJ45 8P8C' S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent Blue	2PCS	
①	CABLE	S/FTP CAT. 6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ARVIN	ALVAN	CHANGE COLOR GREY	2016-11-28	A1
		NEW	2016-09-13	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

COLOUR:GRAY(RAL 7035)					
ITEM NO.	LENGTH(L)		TOLERANCE(T)		
21. 15. 2970	300mm		± 10mm		
21. 15. 2800	500mm		± 15mm		
21. 15. 2801	1000mm		± 30mm		
21. 15. 2804	1500mm		± 45mm		
21. 15. 2802	2000mm		± 60mm		
21. 15. 2803	3000mm		± 90mm		
21. 15. 2805	5000mm		± 150mm		
21. 15. 2806	7000mm		± 210mm		
21. 15. 2807	10000mm		± 300mm		
21. 15. 2808	15000mm		± 450mm		
21. 15. 2809	20000mm		± 600mm		
ITEM NO.	21. 15. 2970	21. 15. 2800	21. 15. 2801	21. 15. 2802	21. 15. 2803
21. 15. 2804	21. 15. 2805	21. 15. 2806	21. 15. 2807	21. 15. 2808	21. 15. 2809
DESC.	ROLINE S/FTP PatchCord CAT. 6A, LSOH, Comp. Level, grey				

SECOMP