

## Product Highlights

### Next Generation Connectivity

Features next-generation 802.11ac Wave 2 technology to deliver a reliable wireless connection at unparalleled combined speeds

### Unparalleled Performance

Experience smooth and stable performance with a powerful CPU, band steering, and Airtime Fairness to ensure that every client has equal access to air time

### Optimised Wireless Experience

MU-MIMO and dual-band technology provide optimal wireless experience in high-density environments



## DWL-8620AP

# Wireless AC2600 Wave 2 Dual-Band Unified Access Point

## Features

### Ideal for Businesses

- Multiple virtual access points can be created from a single access point
- Flexible QoS with WMM
- Power over Ethernet enables installation in hard to reach locations
- UL2043-certified chassis (Plenum-rated SKU)

### High-Performance Connectivity

- Supports 160 MHz channel for doubled capacity
- Band steering for efficient traffic management
- Airtime Fairness
- 802.11k Fast Roaming<sup>1</sup>
- Supports Link Aggregation

### Trusted Wireless Security Features

- WPA/WPA2 Personal
- WPA/WPA2 Enterprise
- MAC address filtering
- Rogue AP detection

The DWL-8620AP Wireless AC2600 Wave 2 Dual-Band Unified Access Point is specially designed for small to medium businesses or enterprises, providing unparalleled bandwidth and flexibility for administrators looking to deploy a medium to large scale Wi-Fi network utilising the cutting-edge speed of Wireless AC Wave 2. Not only can it operate in standalone mode, the DWL-8620AP can also be centrally managed by D-Link Wireless Controllers. Highly manageable and capable of blazing speeds, it integrates seamlessly into any existing network infrastructure and can be easily scaled to meet future demands.

## Greater Speed and Connectivity

The DWL-8620AP leverages the full potential of 802.11ac Wave 2 to provide unparalleled connectivity with ultra-high combined data rates of up to 2,533 Mbps<sup>2</sup>. In addition, it supports Link Aggregation, which allows two Gigabit Ethernet ports to be linked together and act as a single port to double the available bandwidth and maximise the overall throughput of the access point.

## MU-MIMO Technology

The DWL-8620AP supports MU-MIMO (Multi-User Multiple Input Multiple Output), which enables the device to simultaneously communicate with multiple clients using multiple antennas. This allows the access point to utilise the spectrum more efficiently and significantly increase the network capacity. The DWL-8620AP support 4 x 4 MU-MIMO to take full advantage of all streams to serve more wireless clients to dramatically improve wireless performance.

## Easy to Install

The DWL-8620AP can be ceiling mounted or wall mounted to meet the needs of any wireless application. For additional flexibility, it has integrated Power over Ethernet (PoE) support, allowing the devices to be installed in areas where power outlets are not readily available.

## Wireless AC2600 Wave 2 Dual-Band Unified Access Point

### Centrally Managed

When working in conjunction with D-Link Wireless Controllers, the DWL-8620AP can be centrally managed. This allows for a large number of access points to be deployed and managed easily and efficiently. Once the APs are discovered by the controller, the administrator can push the configuration to them as a group, instead of configuring each access point individually. Additionally, Radio Frequency (RF) resource management<sup>1</sup> allows wireless coverage to be managed centrally, providing the best coverage possible for wireless clients.


### Automatic Radio Frequency (RF) Management

When access points are deployed in close proximity to each other, there may be interference between channels if RF management is not implemented. When the DWL-8620AP senses a neighbour nearby, it will automatically select a non-interfering channel. This greatly reduces RF interference and will allow the administrator to deploy APs more densely. To further minimise interference, when a nearby AP is on the same channel, the DWL-8620AP will automatically lower its transmission power<sup>1</sup>. When, for whatever reason, the nearby AP is no longer present, the access point will increase its transmission power to expand coverage.

### Advanced Wireless Features

The DWL-8620AP supports 802.1p Quality of Service (QoS) for enhanced throughput and better performance of time-sensitive traffic like VoIP and streaming DSCP. It also supports Wi-Fi Multimedia (WMM), so in the event of network congestion, time-sensitive traffic can be given priority ahead of other traffic. Furthermore, when a number of access points are in close proximity to each other, an access point will refuse new association requests once its resources are fully utilised, allowing the association request to be picked up by a neighbouring unit, distributing the load over multiple APs. Band steering technology enables the DWL-8620AP to intelligently place clients on the optimal wireless band to avoid congestion and allows for smooth streaming of video, seamless browsing, and fast downloads for mobile devices. Airtime Fairness ensures that equal airtime is given to each client, providing increased performance even if slower devices are connected. 802.11k Fast Roaming<sup>1</sup> is also supported, which allows the wireless client to roam seamlessly between access points.

### L2/L3 network implementation in medium to large enterprise environments

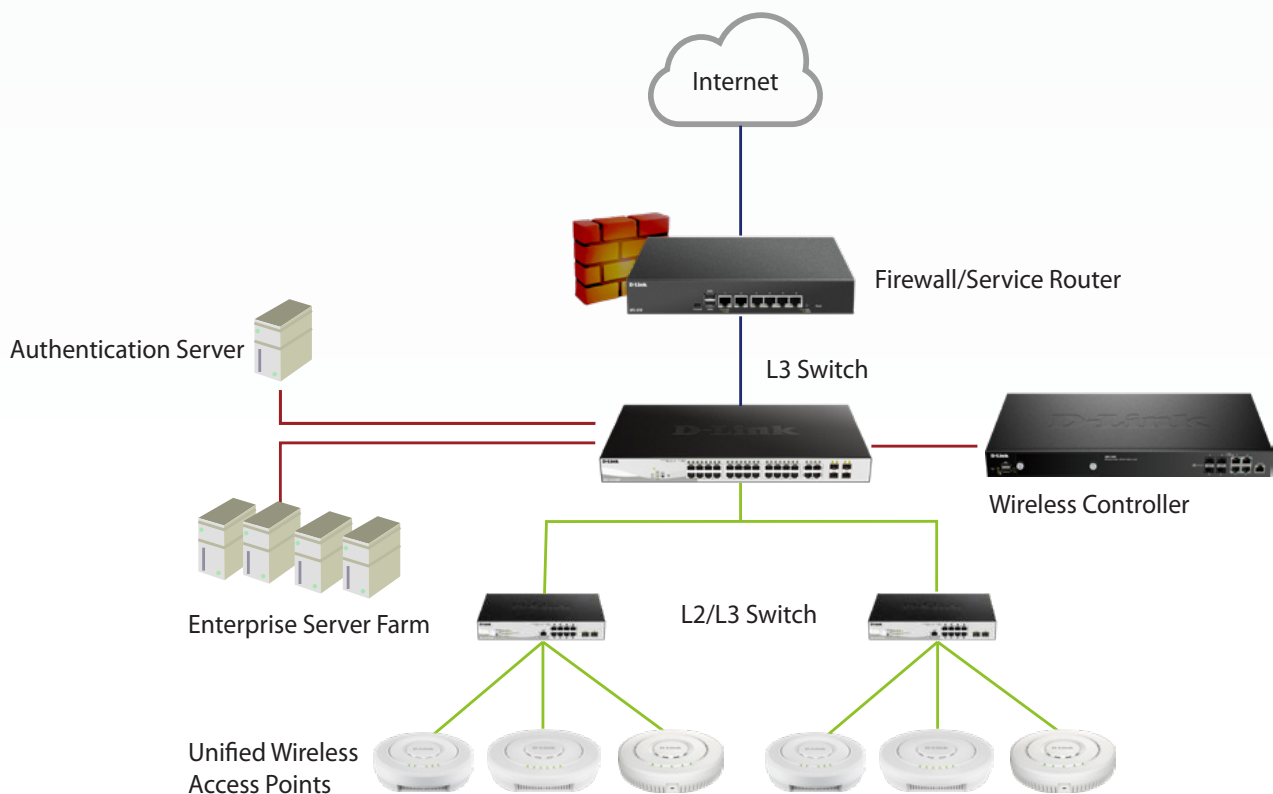

# Wireless AC2600 Wave 2 Dual-Band Unified Access Point

## Technical Specifications

### General

Wireless Interface	<ul style="list-style-type: none"> <li>• IEEE 802.11b/g/n 2.4 GHz wireless</li> <li>• IEEE 802.11/a/n/ac Wave 2 5 GHz wireless</li> </ul>
MIMO	<ul style="list-style-type: none"> <li>• 4 x 4</li> </ul>
Data Rate <sup>2</sup>	<ul style="list-style-type: none"> <li>• 2.4 GHz - Up to 800 Mbps</li> <li>• 5 GHz - Up to 1733 Mbps</li> </ul>
Antenna	<ul style="list-style-type: none"> <li>• Internal omnidirectional antennas               <ul style="list-style-type: none"> <li>• 2.4 GHz: 3 dBi</li> <li>• 5 GHz: 4 dBi</li> </ul> </li> </ul>
Operating Frequency	<ul style="list-style-type: none"> <li>• 2400 to 2483.5 MHz</li> <li>• 5150 to 5850 MHz</li> </ul>
Operating Channels	<ul style="list-style-type: none"> <li>• 1 to 13 channels for 2.4 GHz band (per country code)</li> <li>• 36 to 165 channels for 5 GHz band (per country code)</li> </ul>
Ethernet Interface	<ul style="list-style-type: none"> <li>• 2 x 10/100/1000BASE-T LAN port</li> </ul>
Console Port	<ul style="list-style-type: none"> <li>• RJ-45</li> </ul>

### Functionality

Advanced Features	<ul style="list-style-type: none"> <li>• Auto Channel selection</li> <li>• 802.1p Quality of Service (QoS)</li> <li>• Wireless Multimedia (WMM)</li> <li>• Wireless Distribution System (WDS)               <ul style="list-style-type: none"> <li>• Band steering</li> <li>• Airtime Fairness</li> </ul> </li> <li>• LACP Link Aggregation<sup>3</sup></li> <li>• IEEE 802.11k Fast Roaming</li> </ul>
-------------------	---

### Management

Operating Mode	<ul style="list-style-type: none"> <li>• Standalone mode</li> <li>• Managed mode - Centrally managed by D-Link Wireless Controller</li> </ul>
Management Interfaces	<ul style="list-style-type: none"> <li>• Web-based User Interface (Web UI)               <ul style="list-style-type: none"> <li>• Telnet/SSH</li> </ul> </li> <li>• Command Line Interface (CLI)               <ul style="list-style-type: none"> <li>• SNMP v1/v2c/v3</li> </ul> </li> </ul>


### Security

SSID Security	<ul style="list-style-type: none"> <li>• Up to 32 SSIDs, 16 per radio               <ul style="list-style-type: none"> <li>• 802.1Q VLAN</li> <li>• Station Isolation</li> </ul> </li> </ul>
Wireless Security	<ul style="list-style-type: none"> <li>• WPA/WPA2 Personal/ Enterprise               <ul style="list-style-type: none"> <li>• AES</li> <li>• TKIP</li> </ul> </li> </ul>
Detection & Prevention	<ul style="list-style-type: none"> <li>• Rogue and Valid AP Classification</li> </ul>
Authentication	<ul style="list-style-type: none"> <li>• MAC Address Filtering</li> </ul>

Physical	
Dimensions	• Ø220 x 47 mm (8.66 x 1.97 in)
Weight	• 0.79 kg (1.75 lbs) w/o bracket • 0.84 kg (1.85 lbs) w bracket
Power Supply	• Supports 802.3at PoE PD on LAN 1 Port • External power adapter: 12 V DC 2.5 A (not included)
Power over Ethernet	• IEEE 802.3at
Maximum Power Consumption	• 24.24 W
Enclosure	• Bottom cover – plastic • Top cover – plastic • UL2043-certified chassis
Temperature	• Operating: 0 to 40 °C (32 to 104 °F) • Storage: -20 to 65 °C (-4 to 149 °F)
Humidity	• Operating: 10% to 90% non-condensing • Storage: 5% to 95% non-condensing
MTBF	• 463,255 hours
Certifications	<ul style="list-style-type: none"> <li>• CE</li> <li>• EN55032, EN55024, EN61000-3-2, EN61000-3-3, EN60601-1-2 (Medical electrical equipment), EN301489-1, EN301489-17, EN300328, EN301893</li> <li>• FCC</li> <li>• IC</li> <li>• cUL+UL</li> <li>• CB</li> <li>• RCM</li> <li>• NCC</li> <li>• BSMI</li> <li>• UL2043</li> </ul>


### Radio Patterns

#### 2.4 GHz Antenna Ceiling Mounted

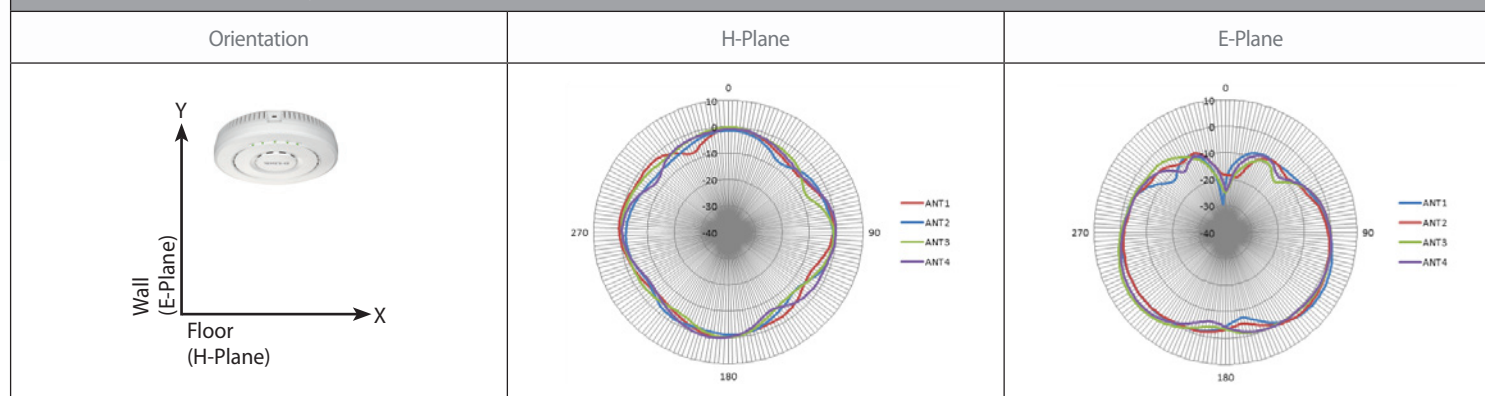


## Wireless AC2600 Wave 2 Dual-Band Unified Access Point


## 2.4 GHz Antenna Wall Mounted

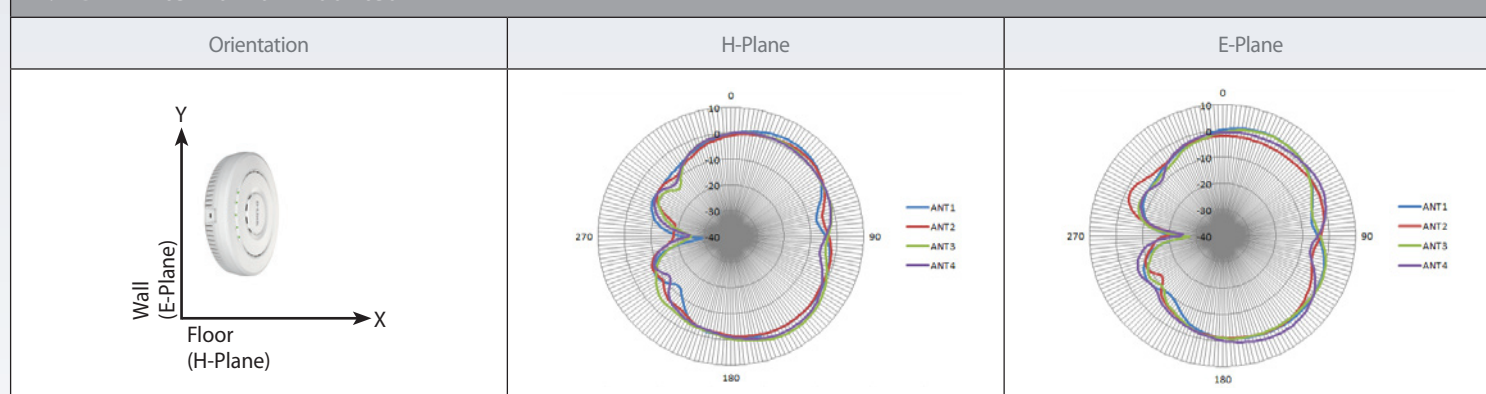

## 5 GHz Antenna Ceiling Mounted

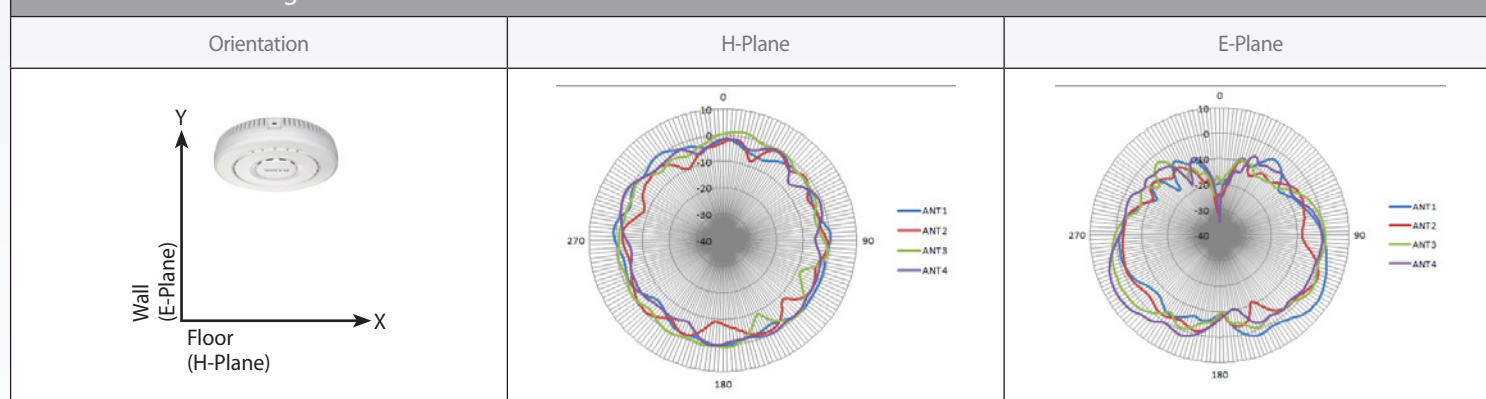

## 5 GHz Antenna Wall Mounted

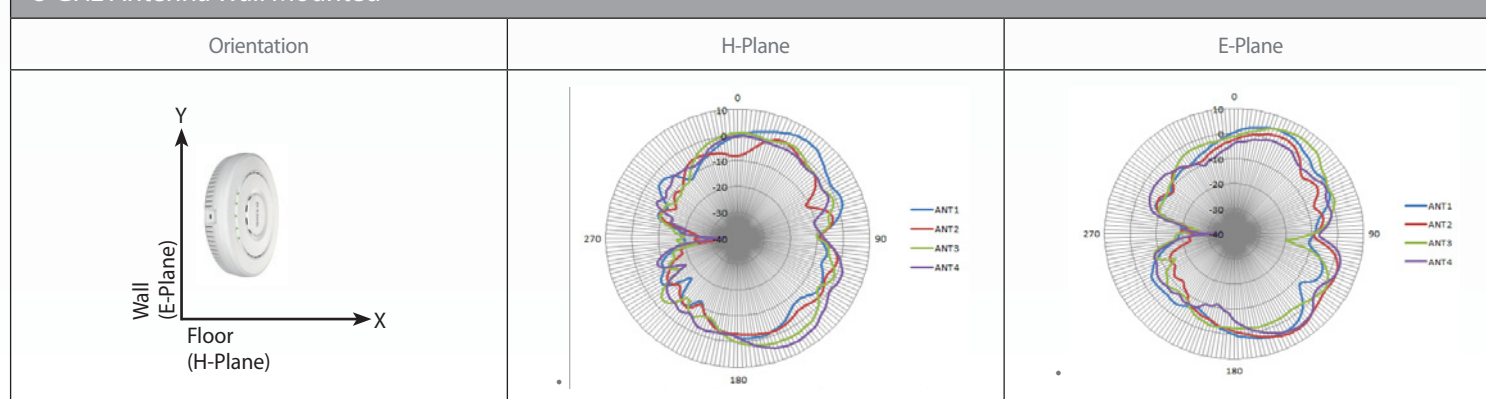

<sup>1</sup> This feature is available when Unified AP is used in conjunction with D-Link's line of Unified Wireless Controllers.

<sup>2</sup> Maximum wireless signal rate derived from IEEE standard 802.11n and 802.11ac specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors may adversely affect wireless signal range.



For more information: [www.dlink.com](http://www.dlink.com)

**D-Link European Headquarters.** D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2018 D-Link Corporation. All rights reserved. E&OE.

Updated November 2018

**D-Link®**